

## P3010 VACUUM SWITCH, MINI, PRE-SET, THREADED



- ▶ Patented multistage COAX® cartridge - MINI - with Pi, Si, Xi cartridge.
- ▶ Electromechanical vacuum switch with digital output.
- ▶ Built-in red LED that indicates status.
- ▶ Includes a flow-through silencer and a built-in vacuum filter for harsh environments.
- ▶ High system reliability in case of fluctuating or low feed pressure.
- ▶ Suitable for fast and reliable evacuation in sealed systems.

### TECHNICAL DATA

Description	Unit	Value
Feed pressure, max. (pump)	MPa	0.7
Noise level	dBA	66-68
Pressure, max (switch)	MPa	0.2
Material		PP, PA, Al, , NBR, TPU, SS, CuZn(Au)
Temperature range	°C	-10-50
Weight	g	115-362
Signal range	-kPa	30, 50 or 70 +5/-3
Function		PNP NO/NC, NPN NO/NC
Hysteresis	kPa	6 ± 1
Voltage	VDC	24 (12-30)
Safety classification		IP40
Current max	mA	100 inductive/400 resistive
Voltage drop, max (100mA/24V inductive load)	VDC	0.055
Response time	ms	4
Display		Red LED
Electric connection		M8 3-pin male

### PERFORMANCE TABLES

Depending upon choice of COAX® Cartridge, performance data of the P3010 can be found in the tables for vacuum flow, evacuation time and blow flow on the P3010 or COAX® Cartridge datasheets.

## ORDERING INFORMATION

1. Select housing	P3010 Code
Housing, connection $\varnothing=6$ mm	00
Housing, connection 1/8" NPSF	01

2. COAX® cartridge modules	P3010 Code
COAX® cartridge module Pi12-3FSx1	AE
COAX® cartridge module Pi12-3FSx1, non-return valve	AF
COAX® cartridge module Pi12-3FSx2	AG
COAX® cartridge module Pi12-3FSx2, non-return valve	AH
COAX® cartridge module Si08-3FSx1	AA
COAX® cartridge module Si08-3FSx1, non-return valve	AB
COAX® cartridge module Si08-3FSx2	AC
COAX® cartridge module Si08-3FSx2, non-return valve	AD
COAX® cartridge module Xi10-3FSx1	AI
COAX® cartridge module Xi10-3FSx1, non-return valve	AJ
COAX® cartridge module Xi10-3FSx2	AK
COAX® cartridge module Xi10-3FSx2, non-return valve	AL

3. Select connection and function module	P3010 Code
Connection module high 6x1/8"	01
Connection module low 3x1/8"	02


4. Select ES	P3010 Code
No energy saving	AA
Valve DS23	AB

*For detailed information on Valve DS 23, see separate datasheet.*

5. Select vacuum sensing	P3010 Code
Vacuum switch VS4016 G1/8" male, 30 -kPa	21
Vacuum switch VS4016 G1/8" male, 50 -kPa	22
Vacuum switch VS4016 G1/8" male, 70 -kPa	23

Example	Ordering number
Housing, connection $\varnothing 6$ mm Pi12-3FSx1, Connection module high 6x1/8", no energy saving, Vacuum switch VS4016 30 -kPa	P3010.00.AE.01.AA.21

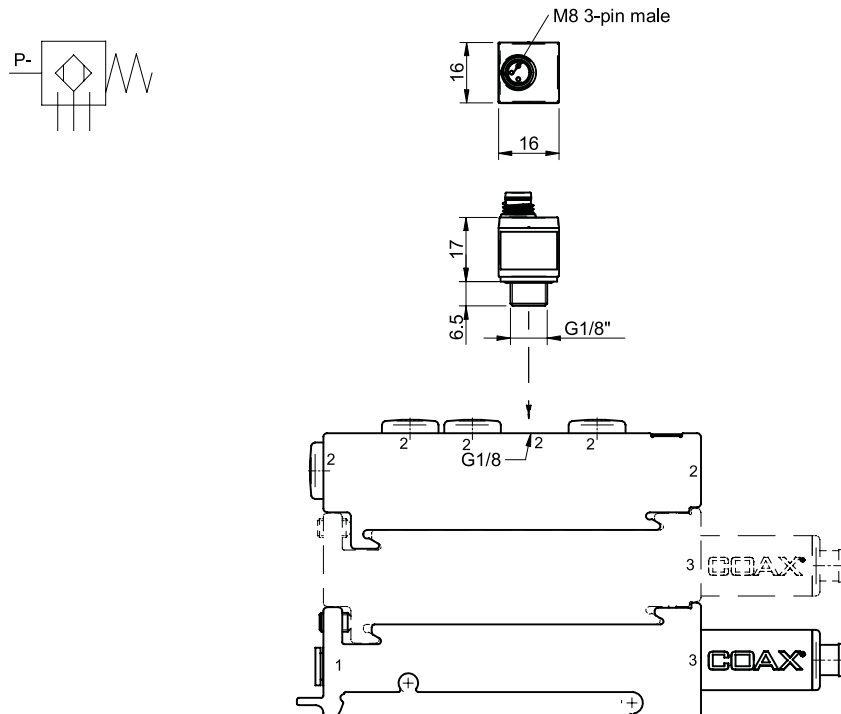

## ORDERING INFORMATION, ACCESSORIES

Description	Art. No.
Sealing kit P3010, NBR	0104201

*The sealing kit includes flap valves, compressed air filter and vacuum filter.*